PCFY-P-VKM-E

Ceiling Suspended Indoor Unit

Designed for ultra-quiet operation and easy maintenance, the unit provides comfortable air conditioning for a wide range of applications where floor or wall space cannot be used practically.

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Drain piping can be connected from left or right

Technical Information

PCFY-P-VKM-E - INDOOR UNIT

MODEL REFERENCE		PCFY-P40VKM-E	PCFY-P63VKM-E	PCFY-P100VKM-E	PCFY-P125VKM-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	12.5	16.0
	Cooling (nominal)	4.5	7.1	11.2	14.0
	Heating (UK)	4.6	7.4	11.6	14.8
	Cooling (UK)	4.3	6.7	10.6	13.2
High Sensible	Cooling (UK)	3.3	5.2	8.1	10.2
SHF	(UK)	0.72	0.72	0.70	0.70
High Sensible	(UK)	0.79	0.77	0.75	0.75
POWER INPUT (kW)	Heating (nominal)	0.04	0.05	0.09	0.11
	Cooling (nominal)	0.04	0.05	0.09	0.11
AIRFLOW (m3/min)	Lo-Mi1-Mi2-Hi	10-11-12-13	14-15-16-18	21-24-26-28	21-24-27-31
NOISE (dBA)	Lo-Mi1-Mi2-Hi	29-32-34-36	31-33-35-37	36-38-41-43	36-39-42-44
WEIGHT (kg)		24	32	36	38
DIMENSIONS (mm)	Width	960	1280	1600	1600
	Depth	680	680	680	680
	Height	230	230	230	230
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A)	Heating	0.28	0.33	0.65	0.76
	Cooling	0.28	0.33	0.65	0.76
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3

PCFY-P40VKM-E

Front View >

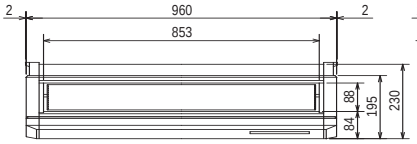

Side View >



Lower View >

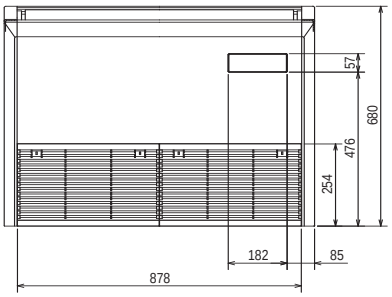

PCFY-P63VKM-E

Front View >

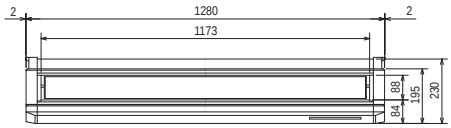

Side View >



Lower View >

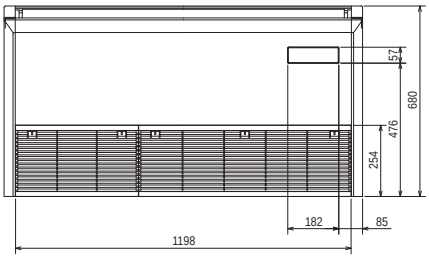

PCFY-P100, 125VKM-E

Front View >



Side View >


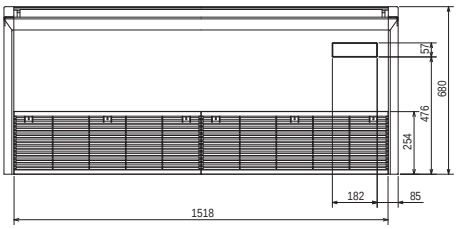
Lower View >